


**Radiant heating & cooling,
plumbing and
local heat distribution**

Uponor

**Product Catalogue 03-2022
Flexible Pipe System (PE-Xa)**

Uponor Aqua Pipe



Uponor Aqua Pipe is manufactured from highest quality cross-linked polyethylene and is designed for tap water application as well as distribution pipes.

Your benefits

- Certified quality
- Corrosion resistant
- Thermal memory
- Lightweight and very flexible
- Durable



Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- Application class 2 - Hot water supply
- Fire classification E according to DIN EN 13501-1.
- Conduits manufactured from high density polyethylene

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Uponor Aqua Pipe natural PN6


- Operating pressure 6 bar
- Coils



Item no.	Dimension	L m	do mm	s mm	p bar	colour	Qty 2	Qty 1	UOM
1008386	16x2,0 100m	100	16	2	6	natural	1100	100	m
1008408	20x2,0 100m	100	20	2	6	natural	700	100	m
1017870	25x2,3 100m	100	25	2,3	6	natural	500	100	m
1048757	32x2,9 50m	50	32	2,9	6	natural	550	50	m
1033417	40x3,7 50m	50	40	3,7	6	natural	250	50	m
1033481	50x4,6 50m	50	50	4,6	6	natural	250	50	m
1033502	63x5,8 50m	50	63	5,8	6	natural		50	m
1033520	75x6,8 50m	50	75	6,9	6	natural		50	m

Uponor Aqua Pipe natural PN10

- Operating pressure 10 bar
- Coils




Item no.	Dimension	L m	do mm	s mm	p bar	colour	Qty 2	Qty 1	UOM
1022682	16x2,2 100m	100	16	2,2	10	natural	1100	100	m
1001201	20x2,8 50m	50	20	2,8	10	natural	550	50	m
1001202	25x3,5 50m	50	25	3,5	10	natural	400	50	m
1001203	32x4,4 50m	50	32	4,4	10	natural	350	50	m
1008963*	40x5,5 50m	50	40	5,5	10	natural	350	50	m
1008964*	50x6,9 50m	50	50	6,9	10	natural		50	m

Uponor Aqua Pipe

Uponor Aqua Pipe natural PN10 S

- Operating pressure 10 bar
- Straight bars



Item no.	Dimension	L m	do mm	s mm	p bar	colour	Qty 2	Qty 1	UOM
1001206	32x4,4 6m	6	32	4,4	10	natural	1080	12	m
1033864	40x5,5 6m	6	40	5,5	10	natural	840	6	m
1033865	50x6,9 6m	6	50	6,9	10	natural	660	6	m
1023122	63x8,6 6m	6	63	8,6	10	natural	420	6	m
1033866	90x12,3 6m	6	90	12,3	10	natural		6	m

Uponor Aqua Pipe in conduit


Specification

- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- Application class 2 - Hot water supply
- Fire classification E according to DIN EN 13501-1.
- Conduits manufactured from high density polyethylene

Application


- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Leakage free tap water installations with possibility to exchange pipes in case of damage

Uponor Aqua Pipe natural in conduit black



Item no.	Dimension	L m	di1 mm	do mm	do1 mm	s mm	p bar	colour	Qty 2	Qty 1	UOM
1008993	16x2,2 25/20 50m	50	20	16	25	2,2	10	black	550	50	m
1008994	20x2,8 28/23 50m	50	23	20	28	2,8	10	black	400	50	m
1008995	25x3,5 34/28 50m	50	28	25	34	3,5	10	black	300	50	m

Uponor Radi Pipe



Uponor Radi Pipe is manufactured using the highest quality cross-linked polyethylene and is designed for radiator connections as well as distribution pipes in heating/cooling application.

Your benefits

- Certified quality
- Thermal memory
- Lightweight, very flexible
- Durable
- Oxygen diffusion tight



Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1.

Application

- Heating: The permanent operating temperature ranges up to 90°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Uponor Radi Pipe natural PN6


- Operating pressure 6 bar
- Coils



Item no.	Dimension	L m	do mm	s mm	p bar	colour	Qty 2	Qty 1	UOM
1047610	16x2,0 120m	120	16	2	6	natural	960	120	m
1022518	20x2,0 120m	120	20	2	6	natural	840	120	m
1022689	25x2,3 50m	50	25	2,3	6	natural	450	50	m
1001220	32x2,9 50m	50	32	2,9	6	natural	550	50	m
1008449	32x2,9 100m	100	32	2,9	6	natural	700	100	m
1008979	40x3,7 50m	50	40	3,7	6	natural	350	50	m
1008975	40x3,7 100m	100	40	3,7	6	natural	700	100	m
1008980	50x4,6 50m	50	50	4,6	6	natural	350	50	m
1008981	63X5,8 50m	50	63	5,8	6	natural		50	m
1008982	75x6,8 50m	50	75	6,9	6	natural	50	50	m

Uponor Radi Pipe natural PN6 S

- Operating pressure 6 bar
- 6 m bars



Item no.	Dimension	L m	do mm	s mm	p bar	colour	Qty 2	Qty 1	UOM
1001222	32x2,9 6m	6	32	2,9	6	natural	12	6	m
1008939	40x3,7 6m	6	40	3,7	6	natural	840	6	m
1008940	50x4,6 6m	6	50	4,6	6	natural	660	6	m
1008941	63X5,8 6m	6	63	5,8	6	natural	420	6	m
1008864	75x6,8 6m	6	75	6,8	6	natural		6	m
1008874	90x8,2 6m	6	90	8,2	6	natural		6	m
1008879	110x10,0 6m	6	110	10,0	6	natural		6	m

Uponor Radi Pipe

Uponor Radi Pipe in conduit

Specification

Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875

EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726

Application class 5 - high temperature radiators

Fire classification E according to DIN EN 13501-1.

Conduits manufactured from high density polyethylene

Application

- Heating: The permanent operating temperature ranges up to 90°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- Leakage free installations with possibility to exchange pipes in case of damage

Uponor Radi Pipe natural in conduit red


- Operating pressure 6 bar

- Coils



Item no.	Dimension	L m	di1 mm	do mm	do1 mm	s mm	p bar	colour	Qty 2	Qty 1	UOM
1008388	16x2,0 25/20 50m	50	20	16	25	2	6	red	550	50	m
1042149	20x2,0 28/23 50m	50	23	20	28	2	6	red	400	50	m

Uponor Teck



Uponor Teck are conduit pipes designed to protect the interior of flexible multilayer pipes used for tap water and heating/cooling application.

Your benefits

- Ensures safe and secure water supply
- Certified quality
- Protects inner pipe
- Colour coding for hot and cold water




Specification

- Corrugated, made of high density polyethylene (HDPE)
- Fire classification E according to EN 13501-1
- Supplied in coils.
- Accessories for conduit fixing, sealing and jointing

Application


- Used for pipe in pipe (PIP) installations to reduce the risk for water damages with possibility to exchange flexible media pipes

Uponor Teck conduit red




Item no.	Dimension	L m	di mm	do mm	colour	Qty 2	Qty 1	UOM
1012858	25/20 50m	50	20	25	red	2500	50	m
1012862	28/23 50m	50	23	28	red	2000	50	m
1012866	35/29 50m	50	29	35	red	1400	50	m

Uponor Teck conduit blue




Item no.	Dimension	L m	di mm	do mm	colour	Qty 2	Qty 1	UOM
1012859	25/20 50m	50	20	25	blue	2500	50	m
1012863	28/23 50m	50	23	28	blue	2000	50	m
1012867	35/29 50m	50	29	35	blue	1400	50	m

Uponor Teck conduit black



Item no.	Dimension	L m	di mm	do mm	colour	Qty 2	Qty 1	UOM
1012860	25/20 50m	50	20	25	black	2500	50	m
1012864	28/23 50m	50	23	28	black	2000	50	m
1012869	35/29 50m	50	29	35	black	1400	50	m
1012872	43/36 25m	25	36	43	black	600	25	m
1023127*	54/48 25m	25	48	54	black	600	25	m

Uponor Q&E



Uponor Q&E is a unique and innovative fittings system that uses the shrink-back effect of cross-linked polyethylene PE-Xa pipes for quick and easy installation. A wide range of fittings and accessories makes Q&E a

complete and secure system for cost-effective installation. Corrosion resistance makes it safe, secure and watertight.

Your benefits

- Elasticity of PE-Xa pipes for high safety
- Corrosion resistant
- Low pressure loss
- Ergonomic design of ring
- Easy identification of ring dimension



Specification


- Q&E fittings and rings for Uponor Pex pipes
- Metal fittings are made of high quality brass
- Plastic fittings are made of polyphenilsulphone
- Q&E rings must be ordered separately if not different mentioned

Application

if not different mentioned:

- Male and female threads acc.to EN 10226-1.


Uponor Q&E evolution ring white



Item no.	Dimension	l mm	di mm	do mm	z mm	p bar	colour	Qty 2	Qty 1	UOM
1057453	16	16	16,2	25,3	1	6+10	white	900	20	pce
1057454	20	20	20,2	29,2	1	6+10	white	520	20	pce
1057455	25	25	25,3	34,6	1	6+10	white	300	20	pce
1057456	32	32	32,4	41,8	1	6+10	white	150	10	pce

Uponor Q&E evolution ring red


- Conical inner shape
- With stop edge
- PE material



Item no.	Dimension	l mm	di mm	do mm	z mm	p bar	colour	Qty 2	Qty 1	UOM
1058010	16	16	16,2	25,3	1	6+10	red	900	20	pce
1058011	20	20	20,2	29,2	1	6+10	red	520	20	pce
1058012	25	25	25,3	34,6	1	6+10	red	300	20	pce

Uponor Q&E


Uponor Q&E evolution ring blue



Item no.	Dimension	l mm	di mm	do mm	z mm	p bar	colour	Qty 2	Qty 1	UOM
1058013	16	16	16,2	25,3	1	6+10	blue	900	20	pce
1058014	20	20	20,2	29,2	1	6+10	blue	520	20	pce
1058015	25	25	25,3	34,6	1	6+10	blue	300	20	pce

Uponor Q&E ring with stop edge natural


- With stop edge
- Pex material



Item no.	Dimension	l mm	di mm	do mm	z mm	p bar	colour	Qty 2	Qty 1	UOM
1045464	40	41	40,8	50,2	3	6+10	natural	80	5	pce
1045489	50	50	51	63	4	6+10	natural	70	5	pce
1045490	63	63	64,3	75,7	4	6+10	natural	35	5	pce
1085087	75	76	76,3	88,3	4	6+10	natural	18	2	pce


Uponor Q&E manifold PPSU

- Main connection for Q&E 25 mm



Item no.	Dimension	outlets	l mm	l1 mm	l2 mm	l3 mm	z1 mm	z2 mm	z3 mm	b mm	b1 mm	p bar	Qty 2	Qty 1	UOM
1008718	25, 3X16 c/c45+35	3	133	34	45	34	16	18	16	45	35	6+10	15	1	pce
1008719	25 4X16 c/c45+2X35	4	168	34	45	34	16	18	16	45	35	6+10	15	1	pce


Uponor Q&E manifold male thread PPSU



Item no.	Dimension	outlets	l mm	l1 mm	l2 mm	l3 mm	z1 mm	z2 mm	z3 mm	b mm	b1 mm	p bar	Qty 2	Qty 1	UOM
1008714	G $\frac{3}{4}$ "MT 3X16 c/c45+35mm	3	133	34	45	34	16	29	16	45	35	6+10	10	1	pce
1008715	G $\frac{3}{4}$ "MT 4X16 c/c45+2X35mm	4	168	34	45	34	16	29	16	45	35	6+10	10	1	pce
1008716	G $\frac{3}{4}$ "MT 1X20+2X16 c/c45+35mm	3	133	34	45	38	16	29	16	45	35	6+10	10	1	pce
1008717	G $\frac{3}{4}$ "MT 1X20+3X16 c/c45+2X35mm	4	168	34	45	38	16	29	16	45	35	6+10	10	1	pce


Uponor Q&E

Uponor Q&E adapter male thread PPSU




Item no.	Dimension	l mm	l1 mm	l2 mm	G mm	z1 inch	p mm	Qty 2	Qty 1	UOM
1008661	16-G½"MT	42	16	18	½	8	6+10	90	5	pce
1008662	20-G½"MT	46	16	22	½	8	6+10	80	5	pce
1008663	20-G¾"MT	48	18	22	¾	8	6+10	60	5	pce
1008664	25-G¾"MT	54	18	28	¾	8	6+10	50	5	pce
1008665	25-G1"MT	58	23	28	1	8	6+10	40	5	pce

Uponor Q&E adapter female thread PPSU




Item no.	Dimension	l mm	l1 mm	l2 mm	Rp mm	z1 inch	p mm	Qty 2	Qty 1	UOM
1042329	16-Rp½"FT	42	17	18	½	7	6+10	80	5	pce
1042330	20-Rp½"FT	45	17	22	½	6	6+10	60	5	pce
1042331	20-Rp¾"FT	47	18	22	¾	7	6+10	50	5	pce
1042332	25-Rp¾"FT	52	18	28	¾	6	6+10	40	5	pce

Uponor Q&E elbow PPSU



Item no.	Dimension	l1 mm	l2 mm	z1 mm	z2 mm	p mm	Qty 2	Qty 1	UOM
1008679	16-16	27	32	9	13	6+10	100	5	pce
1008680	20-20	34	39	12	16	6+10	40	5	pce
1008681	25-25	42	47	14	19	6+10	25	5	pce
1001245	32-32	53	59	18	23	6+10	10	1	pce
1008683	40-40	65	74	21	29	6+10	10	1	pce
1042859	50-50	83	98	29	44	6+10	5	1	pce
1042858	63-63	100	112	33	44	6+10	3	1	pce
1085080	75-75	149	149	64	65	6+10	2	1	pce


Uponor Q&E elbow adapter male thread PPSU



Item no.	Dimension	l1 mm	l2 mm	G mm	z1 mm	z2 mm	p mm	Qty 2	Qty 1	UOM
1008666	16-G½"MT	31	34	½	15	16	6+10	80	5	pce
1008667	20-G½"MT	31	38	½	15	16	6+10	60	5	pce
1008668	25-G¾"MT	36	42	¾	18	15	6+10	40	5	pce


Uponor Q&E

Uponor Q&E elbow adapter female thread PPSU




Item no.	Dimension	l1 mm	l2 mm	Rp inch	z1 mm	z2 mm	p bar	Qty 2	Qty 1	UOM
1042334	16-Rp $\frac{1}{2}$ "FT	27	33	$\frac{1}{2}$	10	15	6+10	50	5	pce
1042335	20-Rp $\frac{1}{2}$ "FT	27	38	$\frac{1}{2}$	9	16	6+10	50	5	pce
1042336	20-Rp $\frac{3}{4}$ "FT	30	41	$\frac{3}{4}$	12	19	6+10	40	5	pce
1042337	25-Rp $\frac{3}{4}$ "FT	32	47	$\frac{3}{4}$	14	19	6+10	35	5	pce

Uponor Q&E coupling PPSU




Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	p bar	Qty 2	Qty 1	UOM
1008669	16-16	39	18	18	3	6+10	100	5	pce
1008932	20-20	47	22	22	3	6+10	80	5	pce
1008671	25-25	58	28	28	3	6+10	50	5	pce
1001235	32-32	73	35	35	3	6+10	15	1	pce
1008673	40-40	90	44	44	3	6+10	10	1	pce
1042866	50-50	113	54	54	5	6+10	10	1	pce
1042865	63-63	141	68	68	6	6+10	5	1	pce
1085084	75-75	179	86	86	7	6+10	10	1	pce

Uponor Q&E reducer PPSU



Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	p bar	Qty 2	Qty 1	UOM
1008674	20-16	43	22	18	3	6+10	100	5	pce
1008675	25-16	49	28	18	3	6+10	40	5	pce
1008676	25-20	53	22	28	3	6+10	40	5	pce
1001240	32-25	66	28	35	3	6+10	20	1	pce
1008678	40-32	82	35	44	3	6+10	10	1	pce
1042879	50-32	94	54	35	5	6+10	10	1	pce
1042867	50-40	103	54	44	5	6+10	10	1	pce
1042878	63-40	117	68	44	6	6+10	5	1	pce
1042877	63-50	128	68	54	6	6+10	5	1	pce
1085086	75-50	147	86	54	6	6+10	10	1	pce
1085085	75-63	160	86	68	7	6+10	10	1	pce


Uponor Q&E tee PPSU



Item no.	Dimension	l1 mm	l2 mm	l3 mm	z1 mm	z2 mm	z3 mm	p bar	Qty 2	Qty 1	UOM
1008684	16-16-16	32	27	32	14	10	14	6+10	60	5	pce
1008685	20-20-20	39	34	39	17	12	17	6+10	30	5	pce
1008686	25-25-25	47	42	47	20	15	20	6+10	20	5	pce
1001250	32-32-32	59	53	59	24	18	24	6+10	10	1	pce
1008688	40-40-40	74	65	74	30	22	30	6+10	5	1	pce
1042861	50-50-50	92	83	92	38	29	38	6+10	3	1	pce
1042860	63-63-63	112	102	112	44	5	44	6+10	2	1	pce
1085081	75-75-75	156	123	156	70	37	70	6+10	2	1	pce

Uponor Q&E


Uponor Q&E tee reducer PPSU



Item no.	Dimension	l1 mm	l2 mm	l3 mm	z1 mm	z2 mm	z3 mm	p bar	Qty 2	Qty 1	UOM
1008710	16-20-16	35	33	35	17	11	17	6+10	40	5	pce
1008700	20-16-16	36	29	32	14	11	14	6+10	40	5	pce
1008689	20-16-20	36	29	36	14	11	14	6+10	40	5	pce
1008697	20-20-16	36	34	32	14	12	14	6+10	40	5	pce
1008711	20-25-20	42	40	42	20	12	20	6+10	25	5	pce
1008702	25-16-16	41	32	32	14	14	14	6+10	25	5	pce
1008699	25-16-20	41	32	36	14	14	14	6+10	25	5	pce
1008690	25-16-25	41	32	41	14	14	14	6+10	25	5	pce
1008701	25-20-16	44	37	35	17	15	17	6+10	25	5	pce
1008703	25-20-20	44	37	39	17	15	17	6+10	25	5	pce
1008691	25-20-25	44	37	44	17	15	17	6+10	20	5	pce
1001420	25-25-20	47	42	42	20	15	20	6+10	20	5	pce
1008712	25-32-25	52	50	52	24	15	24	6+10	15	1	pce
1001422	32-20-25	52	40	44	17	18	17	6+10	15	1	pce
1001424	32-20-32	52	40	52	17	18	17	6+10	15	1	pce
1008704	32-25-20	55	45	42	20	18	20	6+10	15	1	pce
1001426	32-25-25	55	45	47	20	18	20	6+10	15	1	pce
1001428	32-25-32	55	45	55	20	18	20	6+10	15	1	pce
1008713	32-40-32	65	61	65	30	18	30	6+10	10	1	pce
1008707	40-20-32	60	44	52	17	22	17	6+10	5	1	pce
1008694	40-20-40	60	44	60	17	22	17	6+10	5	1	pce
1008708	40-25-32	63	49	55	20	22	20	6+10	5	1	pce
1008695	40-25-40	63	49	63	20	22	20	6+10	5	1	pce
1008709	40-32-32	68	57	59	24	22	24	6+10	5	1	pce
1008696	40-32-40	68	57	68	24	22	24	6+10	5	1	pce
1042876	50-25-40	92	57	82	38	29	39	6+10	4	1	pce
1042864	50-25-50	92	57	92	38	29	38	6+10	4	1	pce
1042863	50-32-50	92	64	92	38	29	38	6+10	4	1	pce
1042862	50-40-40	92	73	82	38	29	39	6+10	4	1	pce
1042875	50-40-50	92	73	92	38	29	38	6+10	4	1	pce
1042871	63-25-50	112	62	99	44	35	45	6+10	2	1	pce
1042873	63-25-63	112	60	112	44	33	44	6+10	2	1	pce
1042870	63-32-63	112	70	112	44	35	44	6+10	2	1	pce
1042869	63-40-40	112	78	99	44	35	55	6+10	2	1	pce
1042872	63-40-63	112	78	112	44	35	44	6+10	2	1	pce
1042868	63-50-50	112	89	99	44	35	45	6+10	2	1	pce
1042874	63-50-63	112	89	112	44	35	44	6+10	2	1	pce
1085083	75-25-75	118	67	118	32	39	32	6+10	4	1	pce
1085082	75-40-75	118	83	118	32	83	32	6+10	4	1	pce


Uponor Q&E

Uponor Q&E tee adapter female thread PPSU




Item no.	Dimension	l1	l2	l3	Rp	z1	z2	z3	p	Qty 2	Qty 1	UOM
		mm	mm	mm	inch	mm	mm	mm	bar			
1042338	16-Rp½"FT-16	33	28	33	½	15	10	15	6+10	50	5	pce
1042339	20-Rp½"FT-20	38	27	38	½	16	10	16	6+10	40	5	pce
1042340	25-Rp½"FT-25	43	30	43	½	15	13	15	6+10	25	5	pce
1042341	25-Rp¾"FT-25	47	31	47	¾	19	13	19	6+10	25	5	pce

Uponor Q&E adapter swivel nut PPSU



Item no.	Dimension	l	l1	l2	G	z1	p	Qty 2	Qty 1	UOM
		mm	mm	mm	inch	mm	bar			
1038021	16-G½"SN	35	8	18	½	9	6+10	50	1	pce
1038022	20-G½"SN	47	9	22	½	16	6+10	40	1	pce
1038023	20-G¾"SN	39	8	22	¾	9	6+10	30	1	pce
1038024	25-G¾"SN	53	8	28	¾	17	6+10	25	1	pce
1038025	25-G1"SN	46	10	27	1	9	6+10	25	1	pce


Uponor Q&E elbow adapter swivel nut PPSU



Item no.	Dimension	l1	l2	G	z1	z2	p	Qty 2	Qty 1	UOM
		mm	mm	inch	mm	mm	bar			
1038037	16-G½"SN	36	27	½	28	9	6+10	40	1	pce
1038038	20-G½"SN	38	31	½	30	10	6+10	35	1	pce
1038039	20-G¾"SN	38	34	¾	29	12	6+10	25	1	pce

Uponor Uni-C bracket SH


- Manifolds and accessories



Item no.	Dimension	Qty 2	Qty 1	UOM
1045451	¾" 1"	25	1	set


Uponor Q&E

Uponor Q&E adapter male thread PL




Item no.	Dimension	l	l1	l2	R	z1	p	Qty 2	Qty 1	UOM
		mm	mm	mm	inch	mm	bar			
1023003	16-R $\frac{1}{2}$ "MT	43	15	18	$\frac{1}{2}$	10	6+10	100	5	pce
1023004	16-R $\frac{3}{4}$ "MT	46	17	18	$\frac{3}{4}$	11	6+10	80	5	pce
1023005	20-R $\frac{1}{2}$ "MT	47	15	22	$\frac{1}{2}$	10	6+10	100	5	pce
1023006	20-R $\frac{3}{4}$ "MT	50	17	22	$\frac{3}{4}$	11	6+10	70	5	pce
1023007	25-R $\frac{3}{4}$ "MT	55	17	27	$\frac{1}{2}$	11	6+10	70	5	pce
1023008	25-R1"MT	58	20	27	$\frac{3}{4}$	11	6+10	40	5	pce
1047191	32-R1"MT	65	21	34	$\frac{3}{4}$	10	6+10	10	1	pce

Uponor Q&E adapter male thread PL/DR




Item no.	Dimension	l	l1	l2	R	z1	p	Qty 2	Qty 1	UOM
		mm	mm	mm	inch	mm	bar			
1085077	40-R1 $\frac{1}{4}$ "MT	73	19	42	1 $\frac{1}{4}$	12	6+10	16	1	pce
1085076	50-R1 $\frac{1}{2}$ "MT	89	20	52	1 $\frac{1}{2}$	17	6+10	8	1	pce
1085075	63-R2"MT	100	24	65	2	11	6+10	6	1	pce
1085074	75-R2 $\frac{1}{2}$ "MT	126	27	86	2 $\frac{1}{2}$	13	6+10	6	1	pce

Uponor Q&E adapter male thread PL



Item no.	Dimension	l	l1	l2	G	z1	p	Qty 2	Qty 1	UOM
		mm	mm	mm	inch	mm	bar			
1047862	25-G $\frac{3}{4}$ "MT	48	11	27	$\frac{3}{4}$	10	6+10	40	5	pce
1047863	25-G1"MT	49	11	27	1	11	6+10	40	5	pce
1047864	50-G1 $\frac{1}{2}$ "MT	82	17	52	1 $\frac{1}{2}$	13	6+10	8	1	pce


Uponor Q&E adapter male thread PL W



Item no.	Dimension	l	l1	l2	G	z1	p	Qty 2	Qty 1	UOM
		mm	mm	mm	inch	mm	bar			
1008730	32-G1"MT	56	10	34	1	12	6+10	20	1	pce
1022290	40-G1"MT	64	11	42	1	11	6+10	16	1	pce
1008732	40-G1 $\frac{1}{4}$ "MT	68	14	42	1 $\frac{1}{4}$	12	6+10	8	1	pce
1008866	50-G1 $\frac{1}{4}$ "MT	78	14	52	1 $\frac{1}{4}$	12	6+10	8	1	pce
1008867	63-G2"MT	95	17	65	2	13	6+10	6	1	pce


Uponor Q&E

Uponor Q&E adapter male thread DR




Item no.	Dimension	l	l1	l2	R	z1	p	Qty 2	Qty 1	UOM
		mm	mm	mm	inch	mm	bar			
1063732	16-R½"MT	43	11	18	½	14	6+10	100	5	pce
1063733	16-R¾"MT	46	11	18	¾	16	6+10	80	5	pce
1063734	20-R½"MT	47	11	22	½	14	6+10	100	5	pce
1063735	20-R¾"MT	50	13	22	¾	15	6+10	70	5	pce
1063736	25-R¾"MT	55	13	22	¾	20	6+10	70	5	pce
1063737	25-R1"MT	58	15	27	1	16	6+10	40	5	pce
1063806	32-R1"MT	65	15	34	1	17	6+10	20	1	pce

Uponor Q&E adapter male thread DR W




Item no.	Dimension	l	l1	l2	G	z1	p	Qty 2	Qty 1	UOM
		mm	mm	mm	inch	mm	bar			
1063810	25-G1"MT	47	11	27	1	9	6+10	35	5	pce
1063724	32-G1"MT	56	10	34	1	12	6+10	10	1	pce
1063725	40-G1 ¼"MT	68	14	42	1 ¼	12	6+10	16	1	pce
1063727	50-G1 ¼"MT	78	14	52	1 ¼	12	6+10	8	1	pce
1063728	63-G2"MT	95	17	65	2	13	6+10	6	1	pce

Uponor Q&E adapter female thread PL



Item no.	Dimension	l	l1	l2	Rp	z1	p	Qty 2	Qty 1	UOM
		mm	mm	mm	inch	mm	bar			
1023009	16-Rp½"FT	41	15	18	½	8	6+10	60	5	pce
1023010	20-Rp½"FT	44	15	22	½	7	6+10	60	5	pce
1023011	20-Rp¾"FT	46	18	22	¾	6	6+10	40	5	pce
1023012	25-Rp¾"FT	51	18	27	¾	6	6+10	40	5	pce
1023013	25-Rp1"FT	55	22	27	1	6	6+10	35	5	pce


Uponor Q&E adapter female thread DR



Item no.	Dimension	l	l1	l2	Rp	z1	p	Qty 2	Qty 1	UOM
		mm	mm	mm	inch	mm	bar			
1063738	16-Rp½"FT	41	15	18	½	8	6+10	60	5	pce
1063739	20-Rp½"FT	44	15	22	½	7	6+10	60	5	pce
1063740	20-Rp¾"FT	46	18	22	¾	6	6+10	40	5	pce


Uponor Q&E

Uponor Q&E adapter female thread PL/DR




Item no.	Dimension	l	l1	l2	Rp	z1	p	Qty 2	Qty 1	UOM
		mm	mm	mm	inch	mm	bar			
1085078	50-RP1 ½"FT	92	21	52	1 ½	19	6+10	8	1	pce

Uponor Q&E adapter female thread PL




Item no.	Dimension	l	l1	l2	G	z1	p	Qty 2	Qty 1	UOM
		mm	mm	mm	inch	mm	bar			
1047866	32-G1"FT	56	13	34	1	9	6+10	20	1	pce
1047867	40-G1 ¼"FT	68	16	42	1 ¼	10	6+10	20	1	pce

Uponor Q&E elbow PL



Item no.	Dimension	l1	l2	z1	z2	p	Qty 2	Qty 1	UOM
		mm	mm	mm	mm	bar			
1047199*	25-25	48	39	12	21	6+10	25	5	pce

Uponor Q&E elbow adapter male thread PL




12.22

Item no.	Dimension	l1	l2	G	z1	z2	p	Qty 2	Qty 1	UOM
		mm	mm	inch	mm	mm	bar			
1023019	16-G½"MT	26	32	½	16	14	6+10	80	5	pce
1023020	20-G½"MT	29	33	½	17	21	6+10	50	5	pce
1023021	20-G¾"MT	29	36	¾	18	14	6+10	40	5	pce
1023022	25-G¾"MT	29	41	¾	20	14	6+10	40	5	pce
1047877	32-G1"MT	49	60	1	26	26	6+10	20	1	pce


Uponor Q&E

Uponor Q&E elbow adapter male thread DR




Item no.	Dimension	l1 mm	l2 mm	G inch	z1 mm	z2 mm	p bar	Qty 2	Qty 1	UOM
1063748	16-G½"MT	26	32	½	16	14	6+10	80	5	pce
1063750	20-G¾"MT	29	36	¾	18	14	6+10	40	5	pce

Uponor Q&E elbow adapter female thread PL




Item no.	Dimension	l1 mm	l2 mm	G inch	z1 mm	z2 mm	p bar	Qty 2	Qty 1	UOM
1023023	16-G½"FT	25	32	½	11	14	6+10	70	5	pce
1023024	20-G½"FT	25	36	½	11	14	6+10	50	5	pce
1023025	20-G¾"FT	26	39	¾	10	17	6+10	30	5	pce
1023026	25-G¾"FT	26	44	¾	10	17	6+10	35	5	pce

Uponor Q&E elbow adapter female thread DR



Item no.	Dimension	l1 mm	l2 mm	G inch	z1 mm	z2 mm	p bar	Qty 2	Qty 1	UOM
1063752	16-G½"FT	25	32	½	11	14	6+10	70	5	pce
1063753	20-G½"FT	25	36	½	11	14	6+10	50	5	pce
1063754	20-G¾"FT	26	39	¾	10	17	6+10	30	5	pce
1063755	25-G¾"FT	26	44	¾	10	17	6+10	35	5	pce

Uponor Q&E tee adapter female thread PL




12.22

Item no.	Dimension	l1 mm	l2 mm	l3 mm	Rp1 inch	z1 mm	z2 mm	z3 mm	p bar	Qty 2	Qty 1	UOM
1047885	16-Rp½"FT-16	32	26	32	½	14	9	14	6+10	50	5	pce
1047886	20-Rp½"FT-20	36	28	36	½	14	11	14	6+10	30	5	pce
1047888	25-Rp¾"FT-25	44	34	44	¾	17	16	17	6+10	20	5	pce
1047201	32-Rp1"FT-32	59	49	59	1	25	28	25	6+10	10	1	pce


Uponor Q&E

Uponor Q&E adapter swivel nut PL




Item no.	Dimension	l	l1	l2	G	z1	p	Qty 2	Qty 1	UOM
		mm	mm	mm	mm	inch	mm	bar		
1023014	16-G $\frac{1}{2}$ "SN	32	6	18	$\frac{1}{2}$	8	6+10	100	5	pce
1023015	20-G $\frac{1}{2}$ "SN	42	8	22	$\frac{1}{2}$	13	6+10	60	5	pce
1023016	20-G $\frac{3}{4}$ "SN	36	7	22	$\frac{3}{4}$	8	6+10	50	5	pce
1023017	25-G $\frac{3}{4}$ "SN	49	7	27	$\frac{3}{4}$	15	6+10	45	5	pce
1023018	25-G1"SN	44	10	27	1	7	6+10	40	5	pce

Uponor Q&E adapter swivel nut DR




Item no.	Dimension	l	l1	l2	G	z1	p	Qty 2	Qty 1	UOM
		mm	mm	mm	mm	inch	mm	bar		
1063743	16-G $\frac{1}{2}$ "SN	32	6	18	$\frac{1}{2}$	8	6+10	100	5	pce
1063744	20-G $\frac{1}{2}$ "SN	42	8	22	$\frac{1}{2}$	12	6+10	60	5	pce
1063745	20-G $\frac{3}{4}$ "SN	36	7	22	$\frac{3}{4}$	7	6+10	50	5	pce

Uponor Q&E elbow adapter swivel nut PL

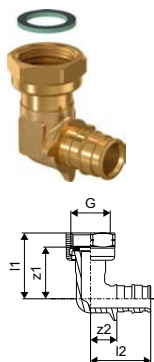

Item no.	Dimension	l1	l2	G	z1	z2	p	Qty 2	Qty 1	UOM
		mm	mm	mm	mm	mm	mm	bar		
1047879	16-G $\frac{1}{2}$ "SN	35	32	$\frac{1}{2}$	28	14	6+10	70	5	pce
1047880	20-G $\frac{1}{2}$ "SN	37	33	$\frac{1}{2}$	29	11	6+10	50	5	pce
1047881	20-G $\frac{3}{4}$ "SN	39	36	$\frac{3}{4}$	32	14	6+10	35	5	pce
1047882	25-G $\frac{3}{4}$ "SN	39	41	$\frac{3}{4}$	32	14	6+10	35	5	pce


Uponor Q&E adapter DR S-Press



Item no.	Dimension	l	l1	l2	z1	Qty 2	Qty 1	UOM
		mm	mm	mm	mm			
1062845	16-Q&E16	47	22	18	8	20	1	pce
1062846	20-Q&E20	52	23	22	8	10	1	pce
1062861	25-Q&E25	65	31	27	8	10	1	pce


Uponor Q&E

Uponor Q&E adapter for soldering PL




Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	p bar	Qty 2	Qty 1	UOM
1047938	16-12CU	31	10	18	3	6+10	100	5	pce
1023040	16-15CU	34	13	18	3	6+10	100	5	pce
1023041	20-15CU	38	13	22	3	6+10	100	5	pce
1047940	20-18CU	38	13	22	3	6+10	80	5	pce
1047941	20-22CU	38	13	22	3	6+10	80	5	pce
1023042	25-22CU	43	13	27	3	6+10	40	5	pce

Uponor Q&E adapter DR



Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	p bar	Qty 2	Qty 1	UOM
1008734	16-15CU l=16mm	36	15	18	3	6+10	100	5	pce
1008736	20-22CU l=20mm	45	20	22	3	6+10	100	5	pce

Uponor Q&E stop end



Item no.	Dimension	l mm	l1 mm	z1 mm	Qty 2	Qty 1	UOM
1084671	16	23	20	4	200	20	pce

Uponor Q&E valve concealed PL




Item no.	Dimension	d mm	p bar	l mm	l1 mm	z mm	z1 mm	Qty 2	Qty 1	UOM
1038419	16-16	16	6+10	38,6	28,0	20,6	10,0	10	1	pce
1038420	20-20	20	6+10	39,0	34,1	17,0	12,1	10	1	pce
1038421	25-25	25	6+10	44,8	40,5	17,8	13,5	10	1	pce

Uponor Q&E

Uponor Flex con. valve, long handle


- Chrome plated lever and cover rosette.
- For Concealed valves.



Item no.	Dimension	l mm	do mm	Qty 2	Qty 1	UOM
1023161		67	67,8	10	10	pce

Uponor Flex con valve, public handle

- Chrome plated lever and cover rosette.
- For Concealed valves.

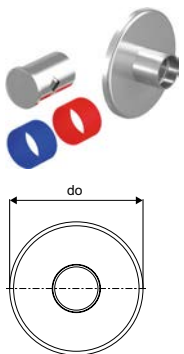

Item no.	Dimension	do mm	Qty 2	Qty 1	UOM
1023162		67,8	10	1	pce

Uponor Flex con valve, wheel handle

- For Concealed valves.



Item no.	Dimension	Qty 2	Qty 1	UOM
1038462		10	1	pce

Uponor Flex con valve handle extension

- For Concealed valves.



Item no.	Dimension	Qty 2	Qty 1	UOM
1023163		520	10	pce

Uponor Q&E

Uponor Smart Aqua

Specification

- Elbows for tap connection and
- Q&E rings must be ordered separately if not different mentioned

Application


- For tap water installations

if not different mentioned:

- Male and female threads acc.to EN 10226-1.


Uponor Smart Aqua U-tap elbow Q&E

- U elbow for loop installation




Item no.	Dimension	l1 mm	l2 mm	l3 mm	Rp inch	z1 mm	z2 mm	b mm	k mm	Qty 2	Qty 1	UOM
1059820*	16-Rp½"FT-16	52	20	20	½	34	5	45	40	5	1	pce
1059821*	20-Rp½"FT-20	56	20	20	½	35	5	45	40	5	1	pce

Uponor Smart Aqua tap elbow Q&E PL



Item no.	Dimension	l1 mm	l2 mm	l3 mm	Rp inch	z1 mm	z2 mm	p bar	Qty 2	Qty 1	UOM
1059822	16-Rp½"FT	39	20	20	½	21	5	6+10	40	5	pce
1059823	20-Rp½"FT	40	20	20	½	18	5	6+10	40	5	pce

Uponor Smart Aqua tap elbow Q&E DR M



Item no.	Dimension	l1 mm	l2 mm	l3 mm	Rp inch	z1 mm	z2 mm	p bar	Qty 2	Qty 1	UOM
1063871	16-½"	39	20	20	½	21	5	6+10	40	5	pce

Uponor Q&E


Uponor S-Press PLUS mounting angle

- Made of galvanized steel.
- For the installation of Uponor Smart Aqua tap elbows
- Positioning of the connections in the given raster
- Plastic pins and loss protected screws M6x12 acc. DIN 965 included
- With holes and slots for easy attachment




NEW

Item no.	Dimension	l mm	s mm	b mm	h mm	k mm	k1 mm	w mm	Qty 2	Qty 1	UOM
1121195	80/150mm	440	3	266	57	80	150	35	5	1	pce




Uponor S-Press PLUS mounting plate

- Made of galvanized steel.
- For the installation of Uponor Smart Aqua tap elbows
- Positioning of the connections in the given raster
- Plastic pins and loss protected screws M6x12 acc. DIN 965 included
- With holes and slots for easy attachment



NEW

Item no.	Dimension	l mm	s mm	h mm	k mm	k1 mm	w mm	Qty 2	Qty 1	UOM
1121197	80/150mm	265	3	9	80	150	35	5	1	pce




Uponor Smart Aqua mounting rack

- Made of galvanized steel.
- For the installation of Uponor Smart Aqua tap elbows.
- Positioning of the connections in the given raster.
- Screws M6x12 acc. DIN 965 included. With holes and slots for easy attachment



Item no.	Dimension	l mm	k mm	Qty 2	Qty 1	UOM
1057844	2m	2000	75	10	1	pce



Uponor Smart Aqua mounting rack bending tool


- For bending the 2 meter long mounting track.



Item no.	Dimension	Qty 2	Qty 1	UOM
1015424	2m	100	1	pce


Uponor Q&E

Uponor Smart Aqua tap elbow Q&E PPSU




Item no.	Dimension	l1	l2	l3	Rp	z1	z2	k	p	Qty 2	Qty 1	UOM
		mm	mm	mm	inch	mm	mm	mm	bar			
1042342	16-Rp $\frac{1}{2}$ " l=43mm	34	17	27	$\frac{1}{2}$	16	10	36	6+10	40	5	pce
1042343	20-Rp $\frac{1}{2}$ " l=43mm	38	17	27	$\frac{1}{2}$	16	10	36	6+10	30	5	pce

Uponor Smart Aqua tap elbow long Q&E PPSU



Item no.	Dimension	l1	l2	l3	Rp	z1	z2	k	p	Qty 2	Qty 1	UOM
		mm	mm	mm	inch	mm	mm	mm	bar			
1042344	16-Rp $\frac{1}{2}$ " l=49mm	34	165	33	$\frac{1}{2}$	16	16	36	6+10	35	5	pce


Uponor Smart Aqua tap elbow Q&E PL



Item no.	Dimension	l1	l2	l3	Rp	z1	z2	k	p	Qty 2	Qty 1	UOM
		mm	mm	mm	inch	mm	mm	mm	bar			
1023034	16-Rp $\frac{1}{2}$ "FT l=43mm	32	17	27	$\frac{1}{2}$	14	10	36	6+10	40	5	pce
1023035	20-Rp $\frac{1}{2}$ "FT l=43mm	36	17	27	$\frac{1}{2}$	14	10	36	6+10	40	5	pce

Uponor Smart Aqua term. box, empty Q&E ME

- For elbow 1042334



Item no.	Dimension	l1	l2	b	h	w	Qty 2	Qty 1	UOM
		mm	mm	mm	mm	mm			
1048622	25/20	90	22	49	123	44	100	10	pce

Uponor Q&E

Uponor Smart Aqua term. box, empty Q&E UP




Item no.	Dimension	Qty 2	Qty 1	UOM
1008845	25/20, 28/23	300	10	pce

Uponor Smart Aqua tap elbow term. box Q&E UP PL

- Fits to box 1008845



Item no.	Dimension	l1	l2	Rp	z1	z2	k	p	Qty 2	Qty 1	UOM
		mm	mm	inch	mm	mm	mm	bar			
1047935	16-Rp½"FT	29	37	½	12	19	39	6+10	3840	40	pce




Uponor Smart Aqua tap elbow term. box Q&E UP DR

- Fits to box 1008845



Item no.	Dimension	l1	l2	Rp	z1	z2	k	p	Qty 2	Qty 1	UOM
		mm	mm	inch	mm	mm	mm	bar			
1063862	16-Rp½"	29	37	½	12	19	39	6+10	40	5	pce



Uponor Smart Aqua term. box, empty Q&E SP

- For plastic tap elbow




Item no.	Dimension	Qty 2	Qty 1	UOM
1038470	34/28 42/36	200	10	pce

Uponor Q&E

Uponor Smart Aqua tap elbow term. box Q&E SP PL


- Fits to box 1038470



Item no.	Dimension	l1 mm	l2 mm	Rp inch	z1 mm	z2 mm	k mm	p bar	Qty 2	Qty 1	UOM
1047932	20-Rp $\frac{1}{2}$ "FT	32	49	$\frac{1}{2}$	15	27	23	6+10	25	5	pce
1047933	25-Rp $\frac{3}{4}$ "FT	32	54	$\frac{3}{4}$	15	27	23	6+10	20	5	pce


Uponor Smart Aqua tap elbow term. box Q&E SP DR

- Fits to box 1038470



Item no.	Dimension	l1 mm	l2 mm	Rp inch	z1 mm	z2 mm	k mm	p bar	Qty 2	Qty 1	UOM
1063860	20-Rp $\frac{1}{2}$ "FT	32	49	$\frac{1}{2}$	15	27	23	6+10	25	5	pce
1063861	25-Rp $\frac{3}{4}$ "FT	32	54	$\frac{3}{4}$	15	27	23	6+10	20	5	pce


Uponor Q&E valve U-shaped



Item no.	Dimension	l mm	l1 mm	l2 mm	l3 mm	z2 mm	h mm	w mm	Qty 2	Qty 1	UOM
1088572	16	75	21	32	27	14	86	56	10	1	pce
1088571	20	75	21	36	27	14	86	60	10	1	pce
1088570	25	87	36	43	36	16	90	67	5	1	pce


Uponor Q&E

Uponor Q&E handle straight



Item no.	Dimension	l mm	do mm	Qty 2	Qty 1	UOM
1088566		60	67,8	10	1	set

Uponor Q&E handle cross

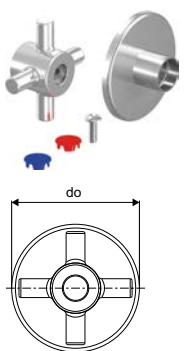

Item no.	Dimension	do mm	Qty 2	Qty 1	UOM
1088569		67,8	10	1	set

Uponor Smart Radi

Specification


- Fittings and accessories for radiator connection
- Q&E rings must be ordered separately if not different mentioned

Application

- Heating with high and with low tempertaure radiators

Uponor Smart Radi elbow adapter plated Q&E

- With coated copper pipe 15 x 1 mm.
- The connection of the coated copper pipe 15 x 1 mm to the radiator can be made with the Uponor clamp compression adapter Cu (Item-No. 1013830).




Item no.	Dimension	l1 mm	l2 mm	z2 mm	p bar	Qty 2	Qty 1	UOM
1023045	16-15CU l=300mm	300	65	47	6+10	40	2	pce
1023047	16-15CU l=1100mm	1100	65	47	6+10	20	2	pce
1023046	20-15CU l=300mm	300	69	47	6+10	30	2	pce

Uponor Q&E

Uponor Smart Radi tee plated Q&E

- With coated copper pipe 15 x 1 mm.
- The connection of the coated copper pipe 15 x 1 mm to the radiator can be made with the Uponor clamp compression adapter Cu (Item-No. 1013830).



Item no.	Dimension	l1 mm	l2 mm	l3 mm	z1 mm	z3 mm	p bar	Qty 2	Qty 1	UOM
1023049	16-15CU-16 l=300mm	34	302	34	16	16	6+10	30	2	pce
1023050	20-15CU-20 l=300mm	39	302	39	17	17	6+10	30	2	pce

Uponor Aqua PLUS


Specification

- Watertight cabinets according to NT VVS 129
- For manifolds with c/c 50 mm
- For M7 cabinet sleeves
- Includes cabinet, splash covers and accesories kit with manifold clips
- Doors and frames (if needed) should be ordered separately
- RAL 9010
- Plastic manifolds for installation in Watertight cabinets
- Manifolds and accesories can be used separtelly
- In case of use of manifolds without cabinets, system watertightness according to NT VVS 129 cannot be guaranteed
- Metal fittings are made of high quality brass
- Plastic fittings are made of polyphenilsulphone
- PPM manifolds with bayonet threads

Application

- Watertight installations to prevent from damages in case of leakage
- All types of manifold installations


Uponor Aqua PLUS manifold Q&E PPM



Item no.	Dimension	outlets	l mm	l1 mm	l2 mm	l3 mm	z1 mm	z2 mm	z3 mm	b mm	p bar	Qty 2	Qty 1	UOM
1047999	1" 2X16 c/c50mm	2	117	33	33	40	17	17	22	50	6+10	10	1	pce
1048000	1" 3X16 c/c50mm	3	167	33	33	40	17	17	22	50	6+10	8	1	pce
1048001	1" 4X16 c/c50mm	4	217	33	33	40	17	17	22	50	6+10	6	1	pce


Uponor Q&E

Uponor Aqua PLUS manifold PPM

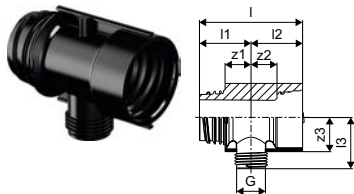


Item no.	Dimension	outlets	l	l1	l2	l3	G	z1	z2	z3	p	Qty 2	Qty 1	UOM
			mm	mm	mm	mm	inch	mm	mm	mm	bar			
1047997	1" 1XG $\frac{1}{2}$ "MT c/c50mm	1	67	33	33	33	$\frac{1}{2}$ "	17	17	23	6+10	20	1	pce
1047998	1" 1XG $\frac{3}{4}$ "MT c/c50mm	1	67	33	33	33	$\frac{3}{4}$ "	17	17	23	6+10	20	1	pce

Uponor Aqua PLUS manifold PPM



Item no.	Dimension	l	l1	l2	l3	z1	z2	b	p	Qty 2	Qty 1	UOM
		mm	mm	mm	mm	mm	mm	mm	bar			
1087121	3X c/c50mm	167	33	33	30	17	17	50	6+10	8	1	pce
1087122	2X c/c50mm	117	33	33	30	17	17	50	6+10	10	1	pce
1087123	1X c/c50mm	67	33	33	30	17	17	50	6+10	20	1	pce


Uponor Aqua PLUS manifold PPM



Item no.	Dimension	l1	l2	l3	c/c	z1	z2	p	Qty 2	Qty 1	UOM
		mm	mm	mm	mm	mm	mm	bar			
1087124	1+1X c/c50mm	30	33	33	50	22	17	6+10	15	1	pce

Uponor Aqua PLUS Outlet Valve PPM Blue

- Plastic shut-off valve with bayonet connection for easy installation to PPM manifolds and adapters. 90° turn to open/close.




Item no.	Dimension	Qty 2	Qty 1	UOM
1096407		50	1	pce

Uponor Q&E


Uponor Aqua PLUS Outlet Valve PPM Red

- Plastic shut-off valve with bayonet connection for easy installation to PPM manifolds and adapters. 90° turn to open/close.



Item no.	Dimension	Qty 2	Qty 1	UOM
1096408		50	1	pce

Uponor Aqua PLUS Q&E adapter PPSU PPM



Item no.	Dimension	l	l1	l2	z1	Qty 2	Qty 1	UOM
1087112	16	37	5	18	11	30	1	pce
1087113	20	48	5	17	22	30	1	pce


Uponor S-Press PLUS ADAPTER PPM

- adapter Aqua PLUS



Item no.	Dimension	Qty 2	Qty 1	UOM
1119005	16	30	1	pce

Uponor Aqua PLUS outlet plug PPSU PPM




Item no.	Dimension	l	l1	l2	Qty 2	Qty 1	UOM
1087110		31	18	13	30	1	pce

Uponor Q&E

Uponor Aqua PLUS adapter male thread PPM




Item no.	Dimension	l	l1	l2	G	z1	p	Qty 2	Qty 1	UOM
		mm	mm	mm	inch	mm	bar			
1048002	1" G $\frac{3}{4}$ "MT	49	17	15	$\frac{3}{4}$	17	6+10	20	1	pce



Uponor Aqua PLUS adapter brass nut PPM




Item no.	Dimension	outlets	l	l1	l2	G	z1	Qty 2	Qty 1	UOM
			mm	mm	mm	inch	mm			
1063785	1"MT-G $\frac{3}{4}$ "SN	2	62	17	12	$\frac{3}{4}$	34	20	1	pce



Uponor Aqua PLUS adapter brass nut PPM




Item no.	Dimension	l	l1	l2	G	z1	Qty 2	Qty 1	UOM
		mm	mm	mm	inch	mm			
1063811	1"FT- $\frac{3}{4}$ "SN	51	17	12	$\frac{3}{4}$	23	25	1	pce



Uponor Aqua PLUS elbow adapter male PPM




Item no.	Dimension	l1	l2	G	z1	z2	Qty 2	Qty 1	UOM
		mm	mm	inch	mm	mm			
1048003	1" G $\frac{3}{4}$ "MT	33	40	$\frac{3}{4}$	17	28	20	1	pce




Uponor Q&E

Uponor Aqua PLUS elbow male female PPM




Item no.	Dimension	l1 mm	l2 mm	z1 mm	z2 mm	Qty 2	Qty 1	UOM
1063782	1"MT-1"FT	39	35	22	20	20	1	pce

Uponor Aqua PLUS manifold end cap PPM




Item no.	Dimension	l mm	z1 mm	Qty 2	Qty 1	UOM
1048004	1"FT	27	15	20	1	pce

Uponor Aqua PLUS end cap, air nipple PPM



Item no.	Dimension	l mm	l1 mm	Qty 2	Qty 1	UOM
1048005	1"FT	40	17	20	1	pce


Uponor Aqua PLUS manifold plug PPM



Item no.	Dimension	l mm	l1 mm	Qty 2	Qty 1	UOM
1087119	MT	30	12	30	1	pce


Uponor Q&E

Uponor Aqua PLUS manifold bracket PPM

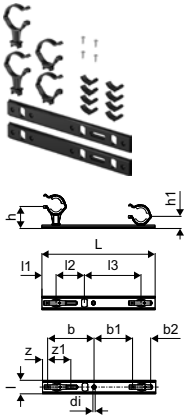


Item no.	Dimension	l	I1	I2	I3	L	di	z	z1	b	b1	b2	h	h1	Qty 2	Qty 1	UOM
1092021		36	38	75	150	300	6	14	62	123	102	48	58	32	50	1	set

Uponor Aqua PLUS manifold clips PPM




Item no.	Dimension	h1	h2	Qty 2	Qty 1	UOM
1087375		28	50	20	1	set

Uponor Q&E manifold male female thread PL

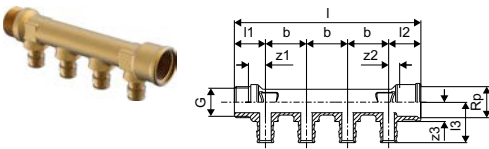

Item no.	Dimension	outlets	l	I1	I2	I3	G	Rp	z1	z2	b	p	Qty 2	Qty 1	UOM
1023027	3/4"MT/FT 2X16 c/c35mm	2	89	27	28	35	3/4	3/4	15	9	35	6+10	20	1	pce
1023028	3/4"MT/FT 3X16 c/c35mm	3	124	27	28	35	3/4	3/4	15	9	35	6+10	15	1	pce
1023029	3/4"MT/FT 4X16 c/c35mm	4	159	27	28	35	3/4	3/4	15	9	35	6+10	10	1	pce


Uponor Q&E manifold male female thread PL

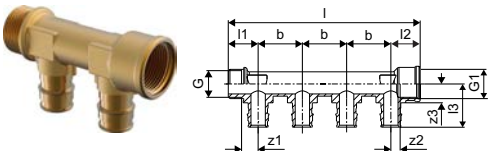

Item no.	Dimension	outlets	l	I1	I2	I3	G	G1	z1	z2	b	Qty 2	Qty 1	UOM
1047925*	3/4"MT/FT 3X20 c/c40mm	3	134	27	27	39	3/4	3/4	15	12	40	15	1	pce
1047926	3/4"MT/FT 4X20 c/c40mm	4	174	27	27	39	3/4	3/4	15	12	40	10	1	pce

Uponor Q&E

Uponor Q&E manifold male female thread DR




Item no.	Dimension	outlets	l	l1	l2	l3	G	Rp	z1	z2	z3	b	p	Qty 2	Qty 1	UOM
			mm	mm	mm	mm	inch	inch	mm	mm	mm	mm	bar			
1063756	3/4"MT/FT 2X16 c/c35mm	2	89	27	28	35	3/4	3/4	15	9	17	35	6+10	20	1	pce
1063757	3/4"MT/FT 3X16 c/c35mm	3	124	27	28	35	3/4	3/4	15	9	17	35	6+10	15	1	pce
1063758	3/4"MT/FT 4X16 c/c35mm	4	159	27	28	35	3/4	3/4	15	9	17	35	6+10	10	1	pce

Uponor Q&E manifold male female, valve PL SH




Item no.	Dimension	outlets	d	IG	p	Qty 2	Qty 1	UOM
			mm	inch	bar			
1048520	1"MT/FT 2X16 c/c38mm	2	16	G 1	6+10	32	1	pce
1048521	1"MT/FT 3X16 c/c38mm	3	16	G 1	6+10	32	1	pce
1048522	1"MT/FT 4X16 c/c38mm	4	16	G 1	6+10	24	1	pce


Uponor Aqua PLUS manif end cap flat seal



Item no.	Dimension	l	l1	G	z1	Qty 2	Qty 1	UOM
		mm	mm	inch	mm			
1001337	3/4"FT	12	7	3/4	5	250	10	pce



Uponor Flex-X



Uponor FLEX-X compression fittings are especially designed for the connection of Uponor flexible pipes with the 3/4" eurocone connection.


Your benefits

- Simple adaptation to 3/4" eurocone manifolds and fittings
- No special tools required



Uponor Flex-X adapter plated PEX


- Made of plated brass
- For connection of Uponor PE-Xa pipes to manifolds
- Female thread 3/4" eurocone acc. to DIN EN ISO 228-1.



Item no.	Dimension	l	l1	G	z1	p	Qty 2	Qty 1	UOM
		mm	mm	inch	mm	bar			
1057441	16x1,8/2,0-3/4"FT Euro	24	16	3/4	1	6	100	10	pce
1045542	16x2,2-3/4"FT Euro	24	16	3/4	1	10	100	10	set
1057442	20X1,9/2,0-3/4"FT Euro	29	16	3/4	5	6	100	10	pce

Uponor Smart Radi adapter

- With 3/4FT eurocone, elastically sealing, for the connection of the coated copper pipe 15 x 1 mm of the Uponor press connection elbow, Uponor press connection tee to the tap battery, radiator or Uponor radiator connection adapter with 3/4FT eurocone.
- Coated brass union nut, brass clamp ring blank and sealing cone made of EPDM.
- Ribbed union nut with wrench size 27.




Item no.	Dimension	l	Qty 2	Qty 1	UOM
		mm			
1013830	15CU-3/4" Euro	21	80	10	pce

Uponor Flex-X


Uponor Smart Radi adapter sealed

- Made of coated brass
- self-sealing
- For the connection of radiators with ½ female thread connectors, ¾ male thread eurocone for the connection of Cu-pipe, 15 x 1 mm, with clamp compression adapter.



Item no.	Dimension	L mm	G inch	G1 inch	Qty 2	Qty 1	UOM
1013906	G¾"MT-G½"MT	34	¾	½	80	10	pce

Uponor Uni-X



Uponor Uni-X is a compression fittings range of 3/4" eurocone connectors and adaptors for tap water and heating/cooling application.

Your benefits

- Simple adaption to other pipes and systems
- Flexible system design
- No special tools required




Application

- For the distribution of heating water for the radiator connection


Uponor Uni-X manifold H 1"SN

- Manifold made of stainless steel
- Flat-sealing connection 1" female thread including flat seal

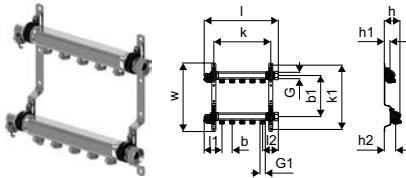

Item no.	Dimension	outlets	l	l1	l2	G	G1	b	b1	b2	h	h1	h2	k	k1	w	p	Qty 2	Qty 1	UOM
			mm	mm	mm	inch	inch	mm	mm	mm	mm	mm	mm	mm	mm	mm	bar			
12.22	1088873	2xG3/4 Euro	210	87	73	1	3/4	50	215	215	75	30	50	135	336	357	6	108	1	pce
12.22	1088874	3xG3/4 Euro	260	87	73	1	3/4	50	215	215	75	30	50	185	336	357	6	108	1	pce
12.22	1088875	4xG3/4 Euro	310	87	73	1	3/4	50	215	215	75	30	50	235	336	357	6	108	1	pce
12.22	1088876	5xG3/4 Euro	360	87	73	1	3/4	50	215	215	75	30	50	285	336	357	6	108	1	pce
12.22	1088877	6xG3/4 Euro	410	87	73	1	3/4	50	215	215	75	30	50	335	336	357	6	72	1	pce
12.22	1088878	7xG3/4 Euro	460	87	73	1	3/4	50	215	215	75	30	50	385	336	357	6	72	1	pce
12.22	1088879	8xG3/4 Euro	510	87	73	1	3/4	50	215	215	75	30	50	435	336	357	6	72	1	pce
12.22	1088880	9xG3/4 Euro	560	87	73	1	3/4	50	215	215	75	30	50	485	336	357	6	72	1	pce
12.22	1088881	10xG3/4 Euro	610	87	73	1	3/4	50	215	215	75	30	50	535	336	357	6	48	1	pce
12.22	1088882	11xG3/4 Euro	660	87	73	1	3/4	50	215	215	75	30	50	585	336	357	6	48	1	pce
12.22	1088883	12xG3/4 EURO	710	87	73	1	3/4	50	215	215	75	30	50	635	336	357	6	48	1	pce

Uponor RS



Uponor RS is a unique system that follows a modular design principle for riser systems and other distribution lines. Just 40 system components enable hundreds of variations, making the system highly

adaptable.

Your benefits

- Innovative plug connection between body and adapter
- Fast and flexible: tool-free assembly, many variations
- More efficient stock management
- Re-adjustment possible until final installation
- Colour coding 16 -110mm for easy dimension selection




Uponor RS coupling

- Made of tin-plated brass
- Base part for all RS2 or RS3 inserts including 2 lock pins.



Item no.	Dimension	l mm	Qty 2	Qty 1	UOM
1029144	RS2-RS2	58	480	1	pce
1029145	RS3-RS3	58	480	1	pce




Uponor RS elbow

- Made of tin-plated brass
- Base part for all RS2 or RS3 inserts including 2 lock pins.




Item no.	Dimension	l1 mm	l2 mm	Qty 2	Qty 1	UOM
1029138	RS2-RS2	51	51	336	1	pce
1029139	RS3-RS3	68	68	240	1	pce



Uponor RS

Uponor RS elbow 45


- Made of tin-plated brass
- Base part for all RS2 or RS3 inserts including 2 lock pins.



Item no.	Dimension	l1 mm	l2 mm	Qty 2	Qty 1	UOM
1029140	RS2-RS2	51	51	336	1	pce
1029141	RS3-RS3	68	68	175	1	pce

Uponor RS tee


- Made of tin-plated brass
- Base part for all RS2 or RS3 inserts including 3 lock pins.



Item no.	Dimension	l1 mm	l2 mm	l3 mm	Qty 2	Qty 1	UOM
1029142	RS2-RS2-RS2	51	51	51	336	1	pce
1029143	RS3-RS3-RS3	68	68	68	175	1	pce

Uponor RS reducer

- Made of tin-plated brass
- Reducer from RS3 to RS2 including 1 lock pin.




Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	Qty 2	Qty 1	UOM
1029146	RS3-RS2	47	20	19	8	480	1	pce

Uponor RS

Uponor RS spacer


- Made of tin plated-brass
- Spacer to connect RS base parts of equal dimensions.



Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	Qty 2	Qty 1	UOM
1046750	RS2-RS2 l=5mm	45	20	20	5	480	1	pce
1046751	RS3-RS3 l=5mm	45	20	20	5	240	1	pce

Uponor RS spacer


- Made of tin-plated brass
- Spacer to connect RS base parts of equal dimensions e.g to create T-manifold or shift in distribution lines.



Item no.	Dimension	l mm	l1 mm	l2 mm	l3 mm	z1 mm	Qty 2	Qty 1	UOM
1046477	RS2-RS2 l=130mm	170	20	20	30	130	240	1	pce
1046478	RS3-RS3 l=210mm	250	20	20	30	210	96	1	pce

Uponor RS adapter PL Q&E

- RS
- Positive listed brass
- Uponor Q&E Ring must be ordered separately



Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	p bar	Qty 2	Qty 1	UOM
1047021	25-RS2	50	20	27	3	6+10	480	1	pce
1047022	32-RS2	57	20	34	3	6+10	480	1	pce
1047023	40-RS2	65	20	42	3	6+10	480	1	pce
1047024	50-RS2	75	20	52	3	6+10	400	1	pce
1047026	63-RS2	88	20	65	3	6+10	400	1	pce


Uponor RS

Uponor RS adapter PL/DR Q&E

- RS
- DR brass
- Uponor Q&E Ring must be ordered separately



Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	p bar	Qty 2	Qty 1	UOM
1085079	75-RS2	111	20	86	5	6+10	6	1	pce




Uponor Wipex RS adapter PN6

- RS = unique modular fitting connection
- 6 bar, SDR 11
- DR = dezincification resistance brass



Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	p bar	Weight kg	Qty 2	Qty 1	UOM
1047013	DR 63x5,8 RS2	75	46	20	9	6	0,94	240	1	pce
1047014	DR 75x6,8 RS2	84	46	20	18	6	1,28	240	1	pce
1047015	DR 90x8,2 RS3	93	59	20	14	6	2,07	180	1	pce
1047016	DR 110x10,0 RS3	105	71	20	14	6	2,67	180	1	pce




Uponor Wipex RS adapter PN10

- RS = unique modular fitting connection
- 10 bar, SDR 7,4
- DR = dezincification resistance brass




Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	p bar	Weight kg	Qty 2	Qty 1	UOM
1047017	DR 63x8,6 RS2	75	20	46	9	10	0,95	240	1	pce
1047018	DR 75x10,3 RS2	83	20	51	12	10	1,33	240	1	pce
1047019	DR 90x12,3 RS3	92	20	59	13	10	2,21	180	1	pce
1047020	DR 110x15,1 RS3	104	20	71	13	10	3,01	180	1	pce



Uponor RS

Uponor RS adapter male thread


- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts



Item no.	Dimension	l mm	l1 mm	l2 mm	R inch	z1 mm	Qty 2	Qty 1	UOM
1059402	R1 ½"MT-RS2	62	20	24	1 ½	18	480	1	pce
1029131	R2"MT-RS2	66	20	23	2	23	480	1	pce
1029132	R2 ½"MT-RS2	63	20	27	2 ½	16	480	1	pce
1029133	R3"MT-RS3	73	20	30	3	23	240	1	pce

Uponor RS adapter female thread


- Made of tin-plated brass.
- fits to all RS2 or RS3 base parts



Item no.	Dimension	l mm	l1 mm	l2 mm	Rp mm	z1 mm	Qty 2	Qty 1	UOM
1059403	Rp½"FT-RS2	42	20	15	½	7	480	1	pce
1029134	Rp1"FT-RS2	45	20	19	1	6	480	1	pce
1029135	Rp2"FT-RS2	54	20	26	2	8	480	1	pce
1029136	Rp2 ½"FT-RS2	63	20	30	2 ½	12	480	1	pce
1059404	Rp½"FT-RS3	43	20	15	½	8	336	1	pce
1029137	Rp3"FT-RS3	65	20	33	3	12	240	1	pce

Uponor RS flange adapter

- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts
- Flange PN6/PN16 acc. to EN 1092-3
- Bolt circle with 4/8 holes.



Item no.	Dimension	l mm	di mm	do mm	z1 mm	k mm	p bar	Qty 2	Qty 1	UOM
1059398	RS2-DN65 (PN6)	38	48,7	160	18	130	6	144	1	pce
1059399	RS2-DN65 (PN16)	45	48,7	185	25	145	16	90	1	pce
1059400	RS3-DN80 (PN6)	38	78,1	190	18	150	6	90	1	pce
1029129	RS3-DN80 (PN16)	45	78,1	200	25	160	16	90	1	pce
1029130	RS3-DN100 (PN16)	44	78,1	220	24	180	16	90	1	pce
1059401	RS3-DN100 (PN6)	41	78,1	210	21	170	6	90	1	pce

Uponor RS


Uponor RS lock pin

- made of plastic
- to lock the RS insert to the RS base part.



Item no.	Dimension	colour	Qty 2	Qty 1	UOM
1042921	RS2 black	black	5000	10	pce
1042922	RS3 grey	grey		10	pce

Uponor Flex



Uponor Flex brings together all accessories, such as cabinets, sleeves, pipe clips, pipe bend supports and tap connections, which are used when installing systems with Uponor flexible pipes.

Your benefits

- Wide range of accessories
- Easy to use
- Fast installation



Uponor Aqua PLUS watguard one valve PPM

1. Plastic membrane solenoid valve(s), Danfoss; EV228A 18P MIX E UN 000 code no. 042U819101 for Tap water PPM modular manifold system with Bayonet thread, grivory on the base valve unit, sealing in EPDM with silicon free lubricant, latching solenoid 12 V DC.
2. Wireless sensor(s) and connection box with sensor tape. wireless sensor and sensor tape, plastic cover, electronic circuit, 2 AA batteries. The sensor is indicating moisture and sends signal to the control unit.
3. Control unit with switches and indicators.



Item no.	Dimension	AG inch	IG inch	Qty 2	Qty 1	UOM
1063201	1"	1	1	10	1	set

Uponor Aqua PLUS watguard two valve PPM


1. Plastic membrane solenoid valve(s), Danfoss; EV228A 18P MIX E UN 000 code no. 042U819101 for Tap water PPM modular manifold system with Bayonet thread, grivory on the base valve unit, sealing in EPDM with silicon free lubricant, latching solenoid 12 V DC.
2. Wireless sensor(s) and connection box with sensor tape wireless sensor and sensor tape, plastic cover, electronic circuit, 2 AA batteries. The sensor is indicating moisture and sends signal to the control unit.
3. Control unit with switches and indicators.



Item no.	Dimension	AG inch	IG inch	Qty 2	Qty 1	UOM
1063202	1"	1	1	10	1	set

Uponor Aqua PLUS watguard off valve PPM

1. Plastic membrane solenoid valve, Danfoss; EV228A 18P MIX E UN 000 code no. 042U819101 for Tap water PPM modular manifold system with Bayonet thread, grivory on the base valve unit, sealing in EPDM with silicon free lubricant, latching solenoid 12 V DC.



Item no.	Dimension	l mm	do mm	h mm	h1 mm	Qty 1	UOM
1063203	1"	111	69	90	68	1	set

Uponor Flex

Uponor Aqua PLUS waterguard sensor


- Wireless sensor and sensor tape, plastic cover, electronic circuit, 2 AA batteries. The sensor is indicating moisture and sends signal to the control unit.



Item no.	Dimension	Qty 2	Qty 1	UOM
1063204		50	1	pce

Uponor Multi bend support plastic


- Impact resistant plastic
- Bend support 90°



Item no.	Dimension	l mm	di mm	c/c mm	z mm	h mm	r mm	Qty 2	Qty 1	UOM
1063781	12	73	10	30	65	18	65	500	50	pce

Uponor Multi bend support plastic


- Impact resistant plastic
- Bend support 90°



Item no.	Dimension	l mm	di mm	z mm	h mm	r mm	Qty 2	Qty 1	UOM
1020224	16	100	15	70	22	70	500	50	pce
1000118	18	115	16,5	90	25	90	250	50	pce
1001229	20	150	22	115	31	115	2300	50	pce
1001230	28	175	27	145	40	145	900	50	pce

Uponor Multi bend support string plastic

- Supporting element for adjustable bendings
- Plastic



Item no.	Dimension	l mm	di mm	do mm	h mm	r mm	Qty 2	Qty 1	UOM
1034554	20	174	21,5	25,5	34	75	200	20	pce
1034555	21-25	280	28,4	33,8	44	120	100	20	pce


Uponor Flex

Uponor Multi bend support galv steel

- Galvanized steel
- Bend support 90°



Item no.	Dimension	l mm	di mm	z mm	h mm	r mm	colour	Qty 2	Qty 1	UOM
1009006	25	170	25,5	134	22	134	galv steel	2340	10	pce
1001231	34	210	32	137	28	137	galv steel	1400	2	pce



Uponor Comfort Pipe end cap

- End cap to protect against dust.




Item no.	Dimension	d mm	Qty 1	UOM
1005393	20	20	1	pce

Uponor Teck single plugged hook

- for fixing pipes up to a max. outside diameter of 32 mm to the raw concrete ceiling
- Made of plastic
- Colour: blue
- Drill hole 8 mm




Item no.	Dimension	l mm	l1 mm	di mm	do mm	Qty 2	Qty 1	UOM
1013137	32 60mm	60	20	32	8	1000	50	pce
1013138	32 80mm	80	20	32	8	1000	50	pce



Uponor Flex

Uponor Teck double plugged hook


- for fixing pipes up to a max. outside diameter of 32 mm to the raw concrete ceiling
- Made of plastic
- Colour: blue
- Drill hole 8 mm



Item no.	Dimension	l mm	di mm	do mm	k mm	Qty 2	Qty 1	UOM
1013139	32 60mm	60	32	8	40	1000	50	pce
1013140	32 80mm	80	32	8	40	1000	50	pce

Uponor Smart Radi cover plate dividable


- Made of polypropylene white
- for Uponor Uni Pipe PLUS and MLC pipes 14 - 20 mm, to cover floor and/or wall penetration of the radiator connection pipe line
- Required inside micrometer (pipe middle - middle) between two Uponor MLC pipes for supply and return flow: 50 mm. The cascaded penetrations can be severed easily with a knife according to desired pipe dimension.
- The snap ring consists of two halves, which are pressed together with two push buttons by hand
- Fire classification B2 acc. to EN 13501-1.



Item no.	Dimension	Qty 2	Qty 1	UOM
1011373	14-20 white double	500	50	pce

Uponor Smart Radi pipe protection

- Made of plastic, white, length 200 mm. Including stoppers for pipes up to 16 mm. Two in a set.




Item no.	Dimension	l mm	l1 mm	l2 mm	di mm	di1 mm	di2 mm	di3 mm	do mm	Qty 2	Qty 1	UOM
1023176	16, l=200mm	200	20	3	12	12	14	16	23	50	1	set

Uponor Flex

Uponor Smart Radi bend support

- Made of white plastic.
- For radiator connections from the floor with PE-Xa and MLC pipes in dimension 16.
- Dividable, for conduit 25/20 mm.
- Min. c/c 40 mm, including 5 mm distance.



Item no.	Dimension	l mm	l1 mm	b mm	b1 mm	b2 mm	h mm	h1 mm	w mm	Qty 2	Qty 1	UOM
1009008	25/20mm	100	21	41	24	46	122	28	30	750	10	pce

uponor

Uponor GmbH

P.O. Box 1641
97433 Hassfurt
Germany

T +49-(0)9521 690 0
F +49-(0)9521 690 750
E international@uponor.com

03/2022



www.uponor.com